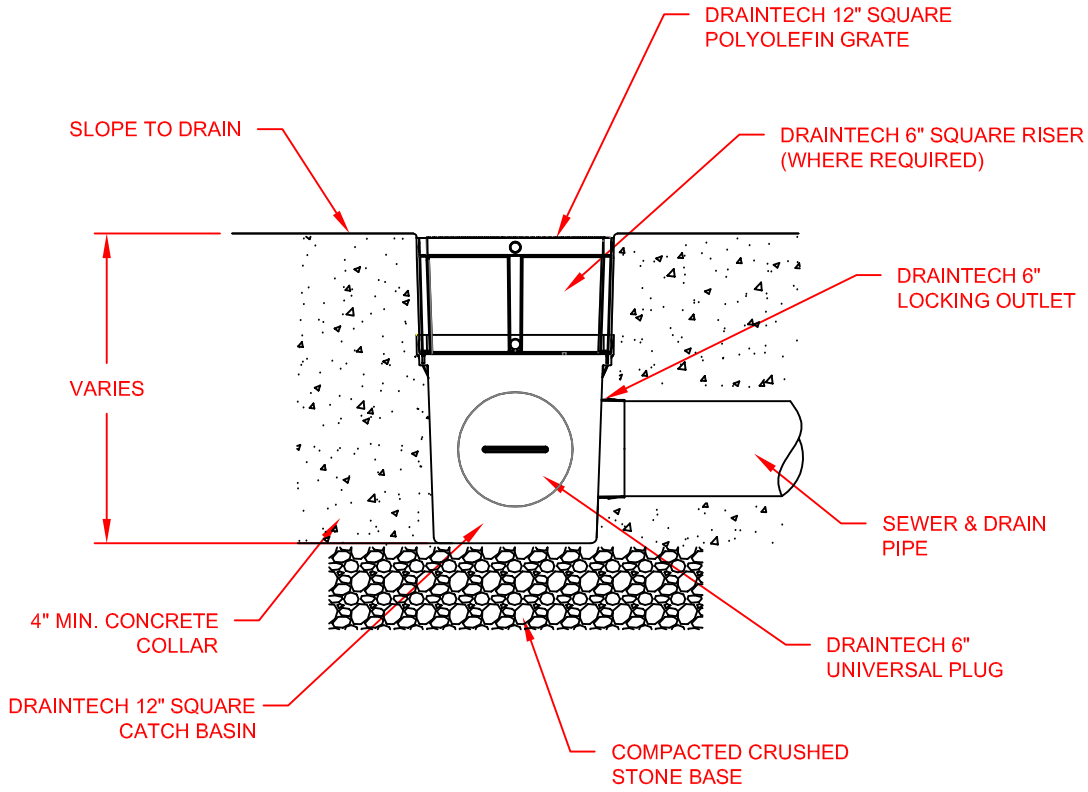


NOTES:

1. MAX COVER OVER TOP OF PIPE IS 4 FT.CONTACT HANCOR IF OTHERWISE GREATER.
2. GRATE OR LID MUST BE INSTALLED PRIOR TO POURING CONCRETE OR BACKFILLING
3. INASPHALT OR HOT MASTIC APPLICATIONS, THE CHANNEL MUST BE ENCASED IN CONCRETE FOR ADDED STRENGTH AND TO PREVENT DISTORTION DURING INSTALLATION.
4. FOR CONCRETE INSTALLATIONS, THE GRATE SHOULD BE INSTALLED AND TAPED OVER PRIOR TO POURING CONCRETE OR BACKFILL TO PREVENT DEBRIS FROM ENTERING DRAIN AND TO PREVENT DEFORMATION OF THE UNIT DURING INSTALLATION.

© 2007 HANCOR, INC.

| REV. | DESCRIPTION | BY | MM/DD/YY | CHK'D |
|---|---|---|---|---|
| 1 | UPDATED DRAWING | TJR | 09/13/07 | CKS |

HANCOR, INC. HAS PREPARED THIS DETAIL BASED ON INFORMATION PROVIDED TO HANCOR. THIS DRAWING IS INTENDED TO DEPICT THE COMPONENTS AS REQUESTED. HANCOR HAS NOT PERFORMED ANY ENGINEERING OR DESIGN SERVICES FOR THIS PROJECT, NOR HAS HANCOR INDEPENDENTLY VERIFIED THE INFORMATION SUPPLIED. THE INSTALLATION DETAILS PROVIDED HEREIN ARE GENERAL RECOMMENDATIONS AND ARE NOT SPECIFIC FOR THIS PROJECT. THE DESIGN ENGINEER SHALL REVIEW THESE DETAILS PRIOR TO CONSTRUCTION. IT IS THE DESIGN ENGINEERS RESPONSIBILITY TO ENSURE THE DETAILS PROVIDED HEREIN MEETS OR EXCEEDS THE APPLICABLE NATIONAL, STATE, OR LOCAL REQUIREMENTS AND TO ENSURE THAT THE DETAILS PROVIDED HEREIN ARE ACCEPTABLE FOR THIS PROJECT.

**DRAINTECH 12"SQ.CB W/SEWER&DR. & SQUARE GR.(CONCRETE APP)**

DRAWING NUMBER: STD-1106B

Hancor
401 OLIVE ST.
FINDLAY, OHIO 45839

| | |
|---|---|
| DRAWN BY: | JCB |
| DATE: | 09.22.05 |
| CK'D BY: | |
| SCALE: | NTS |
| SHEET | OF |

S:\AppEng-shared\ADS-Hancor Standard Details\1100 Series - DrainTech_Installation_Details\Hancor\1106B_SquareBasin_SmoothPipe_SquareGrate(Concrete).dwg, Model, 9/18/2007 4:14:56 PM, trader, CutePDF Writer